

Strapping Round Timber

Refer to the Road Haulage of Round Timber Code of Practice to ensure you are using straps in accordance with industry recommendations and legislation.

- > Recheck the load straps before moving from forest road to public road.
- > Remember; as a driver you are ultimately responsible for the safety of the load.
- > Use additional straps as required for shorter/debarked timber or when road conditions are challenging.




TimberTransportForum

delivering solutions for a growing UK harvest

Timber up to 3.3 metres

Two load straps on front bay nearest cab if no headboard or crane.

Two on front bunk of drag trailer

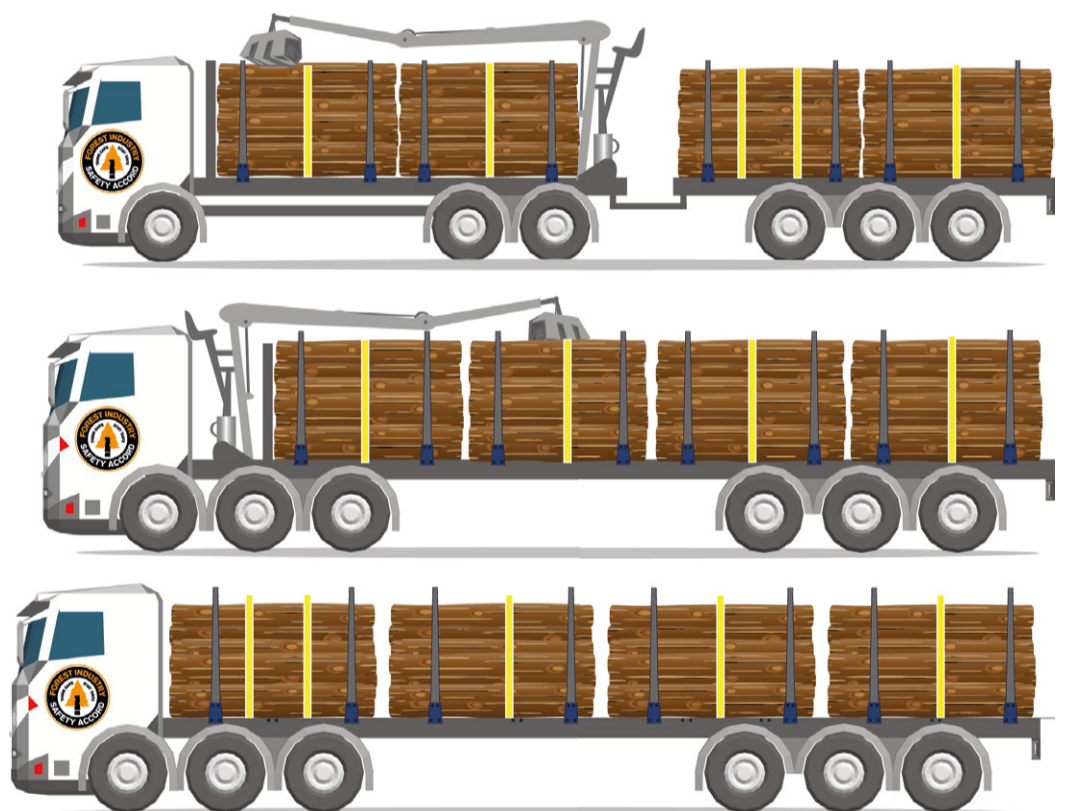

Timber longer than 3.3 metres

Two load straps per bay.

